


HO Alternator Specifications—GM DN and SI Series

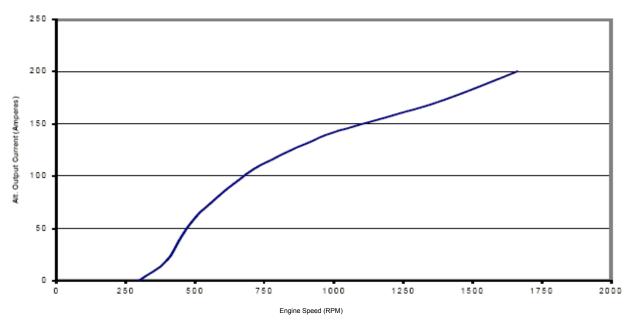

The HO Alternators Nitro series Alternator delivers 2700 VA of clean, regulated DC power in a ruggedly built chassis designed to meet the rigors of military use. This alternator is designed to meet military standards and multiple units can be paralleled for additional power.

ELECTRICAL SPECIFICATIONS:

Rated Power: 2400 VA
Rated Voltage: 12 VDC nominal
Rotation: CW or CCW
Output Current: per curve above

Charge voltage set point: 14.4V Ripple Current: 4

Turn on speed: 500 engine rpm Output at idle: 120 amps

Plug Interface: Direct OE compatible

Efficiency: 87% typical

MECHANICAL SPECIFICATIONS:

Diameter: 6.5"

Mount: Original Equipment

Weight: 18 lbs.
Cooling: Internal fans

SPECIAL FEATURES:

- Custom windings
- High Performance heat sink
- Internal Regulator interface
- Designed to meet MIL standards



426 W 2nd Street Davenport, IA 52801

www.highoutputalternator.com

Phone: 563-323-7994 Fax: 563-323-8089